



PLAN




PLAN



DOUBLE FACE FOR TWO LANE HIGHWAYS

ELEVATION

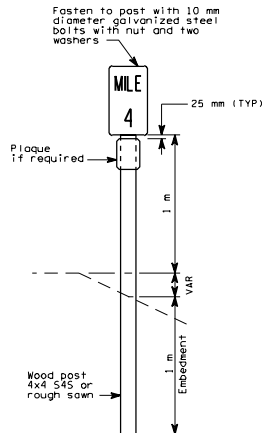


SINGLE FACE FOR MULTILANE HIGHWAYS

ELEVATION



## NOTES


1. Mileposts of the type specified shall be placed as shown hereon. If conditions preclude placement at the correct location, the mileposts may be moved as much as 15 meters in either direction; mileposts that cannot be placed within this degree of accuracy shall be omitted entirely.
2. Mileage for mileposts shall commence at the south or west terminus of the highway route and progress in a north or east direction.
3. All Spur and Equation signs shall have "S" and "B" plaques.
4. Mileposts in cut sections shall be placed at back of ditch. Milepost markers may be placed up to 9 meters from the edge of the traveled way.
5. See "Washington State Sign Fabrication Manual" for the dimensions and colors of the Milepost/Plaque.



PLACEMENT OF MILEPOST AT CUT SECTION

ALL DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE NOTED

## MILEPOST



PLACEMENT OF MILEPOST AT FILL SECTION